


<b>Grafos Steel S.r.l.</b> Via Treves 19/21 41043 Formigine (MO) ITALY Tel. +39.059.57.50.267 www.grafossteel.it		Title: Fit Inox keyboard; 68 buttons (E16 keycap); front mount; USB+PS/2 interface	
Date: 28/12/2016	P/N: <b>FIT.68E16.F</b>	Rev:	File: FIT.68E16.F (Data-sheet).idw
Dimensions without indicated tolerances - precision according to: <b>ISO 2768 F</b>		Tolerance class	
		Lenght (mm)	
		>0 - 6	>6-30
		>30-120	>120-400
		± 0.2	± 0.5
		± 0.8	± 1.2
		± 0.1	± 0.3
		± 0.2	± 0.5
		± 0.05	± 0.15
		± 0.1	± 0.2
Material: -		Surface treatment: -	
		Sheet: 1	Of: 2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

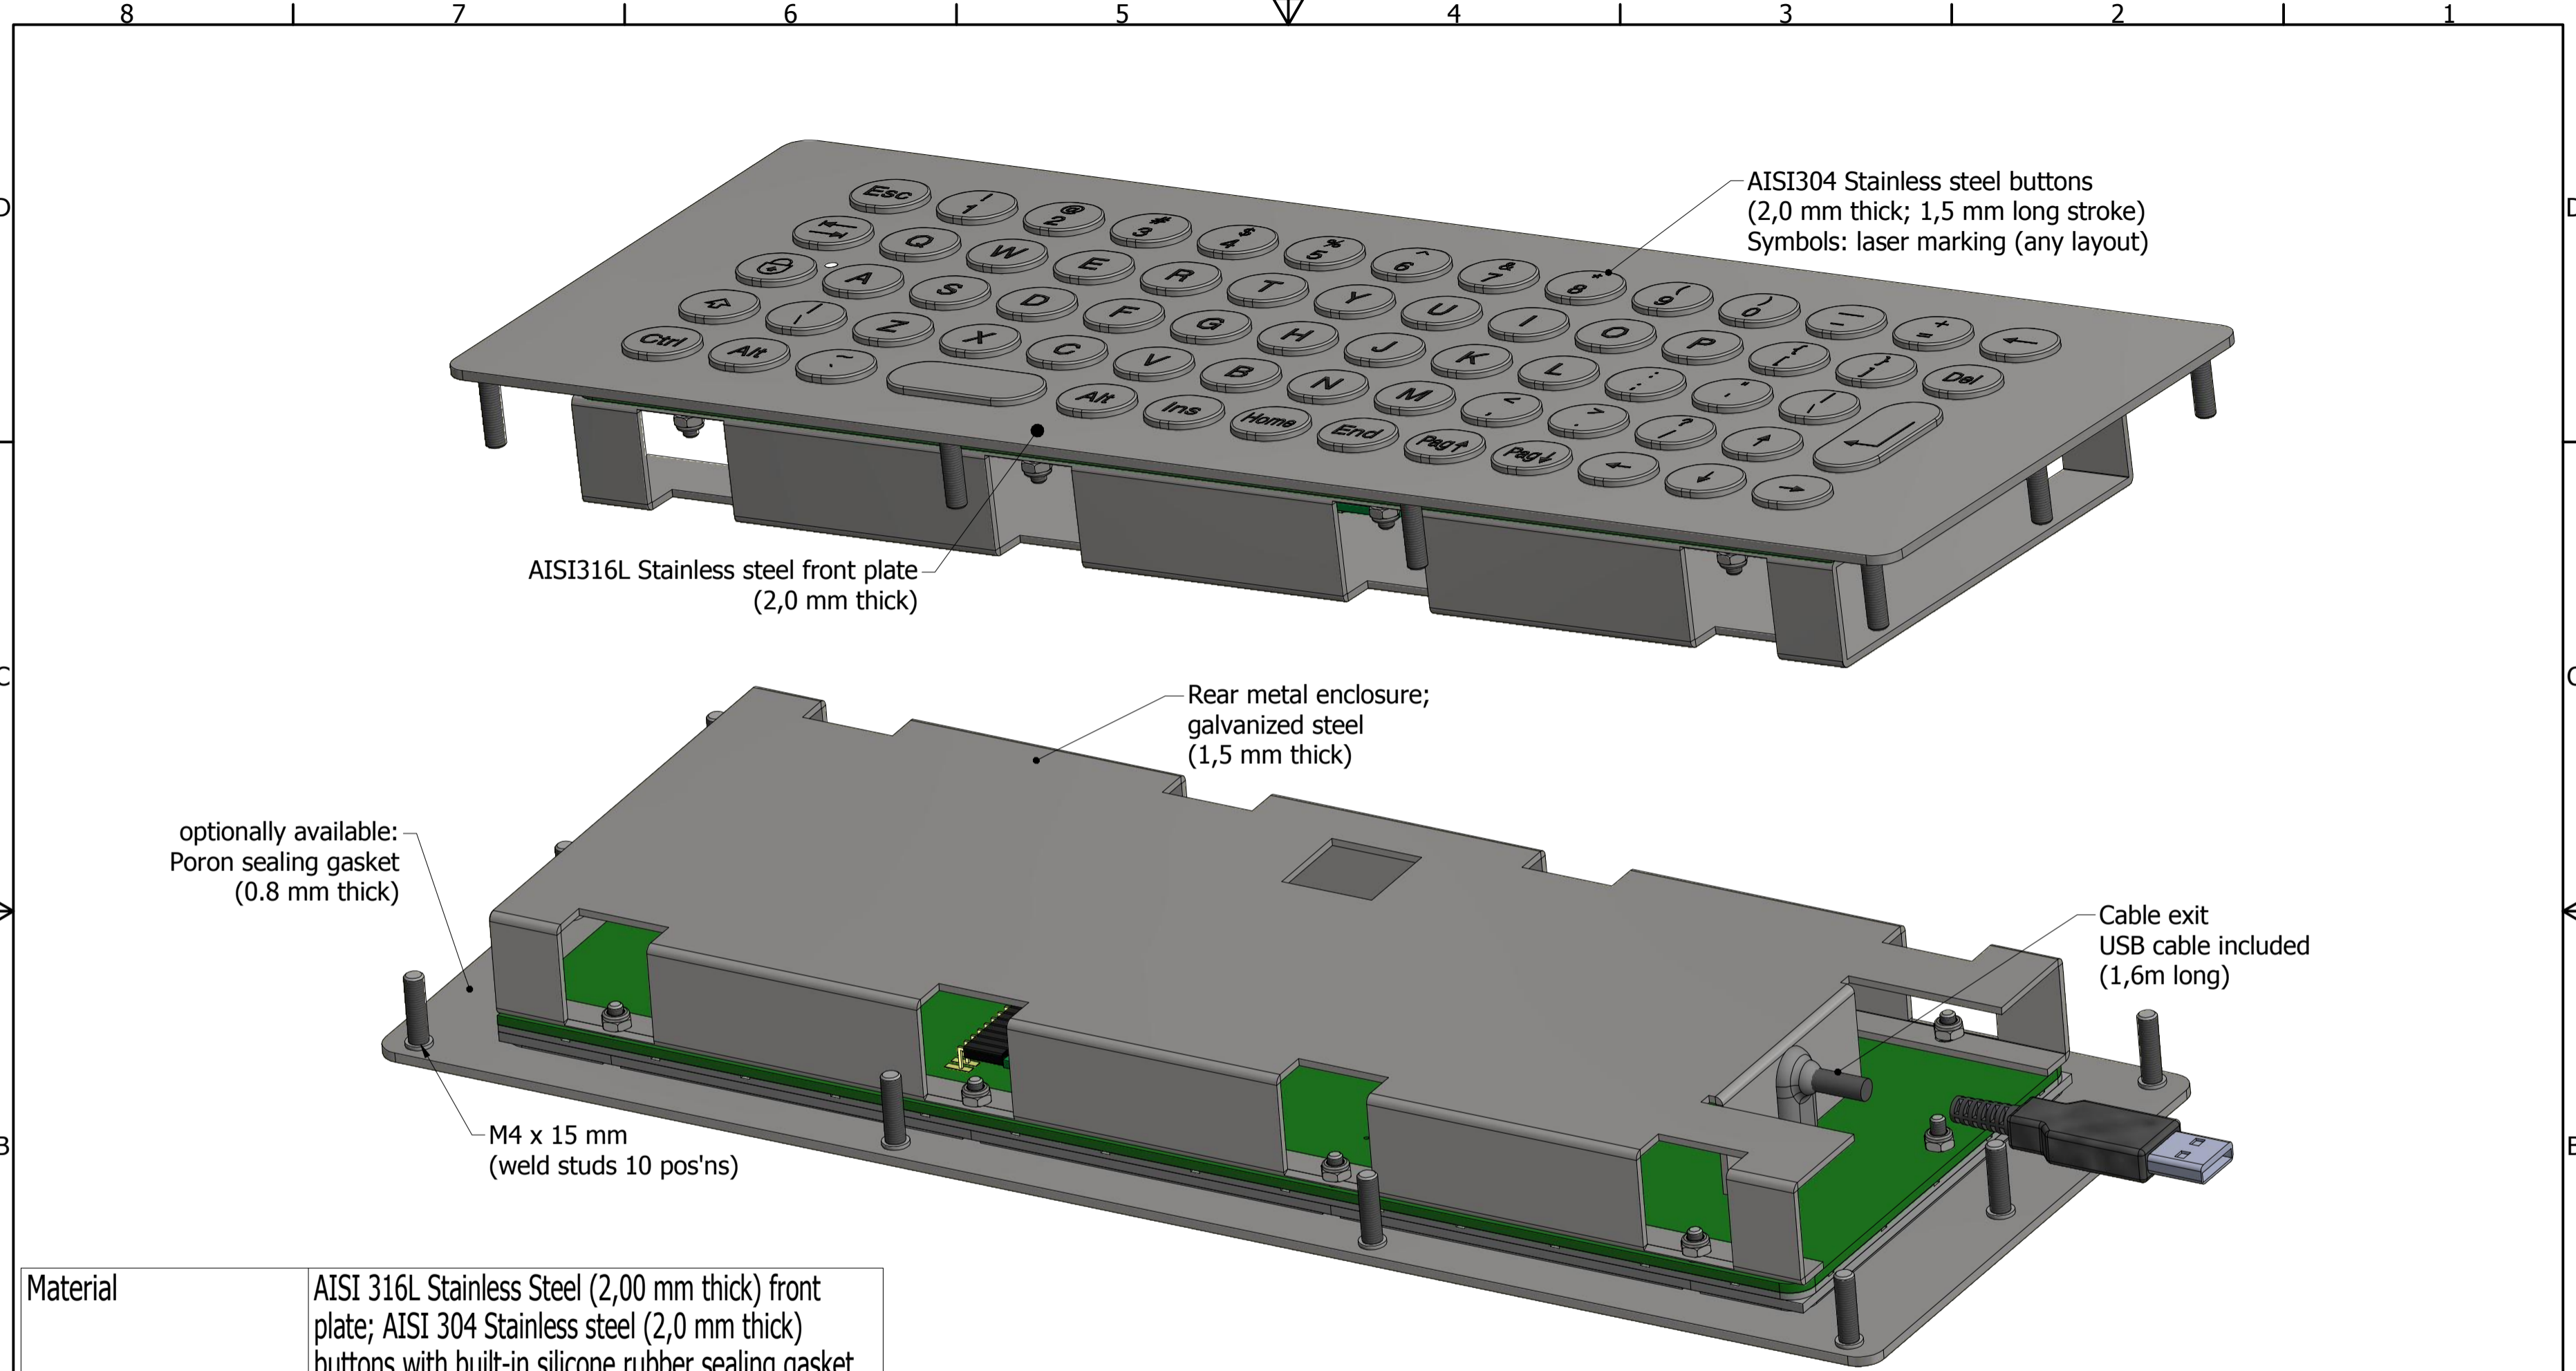

Material	AISI 316L Stainless Steel (2,00 mm thick) front plate; AISI 304 Stainless steel (2,0 mm thick) buttons with built-in silicone rubber sealing gasket
Lettering	Laser marking (any layout)
Button stroke	1,5 mm +/- 0,1 mm
Actuation force	1,5 N (typical)
Life expectancy	>2.000.000 cycles
IP Protection rate	IP65
Impact Protection Rate	IK08
Contact technology	Conductive carbon pill on Gold plated PCB
Connection	USB
Operating temperature	-25°/+85°C
Storage temperature	-25°/+85°C

**Grafos Steel S.r.l.**  
Via Treves 19/21  
41043 Formigine (MO) ITALY  
Tel. +39.059.57.50.267  
www.grafossteel.it

Title: Fit Inox keyboard; 68 buttons (E16 keycap); front mount; USB+PS/2 interface

P/N: **FIT.68E16.F**

Rev:      File: FIT.68E16.F (Data-sheet).idw

Dimensions without indicated tolerances - precision according to: **ISO 2768 F**

Tolerance class	Lenght (mm)			
	>0 - 6	>6-30	>30-120	>120-400
C (Coarse)	±0.2	±0.5	±0.8	±1.2
M (medium)	±0.1	±0.2	±0.3	±0.5
F (Fine)	±0.05	±0.1	±0.15	±0.2

Date: 28/12/2016

Material: -      Surface treatment: -

Drawn: **A. Tosi**

Approved:

Sheet: 2      Of: 2

**UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS**